



## 18 Gauge White Rvi Wire 100 Foot Roll

Non Stock, Item Must Be Ordered. 18 gauge RVI hook-up wire is ideal for machine tools, control cabinets, automotive and marine applications. The thermoplastic insulation is moisture resistant and provides extra protection against nicks and cuts. UL style 1015/1230, 105°C, rated for 600 volts. Manufactured to meet or exceed the specifications of the RVI, NFDA, ANSI and J1128. CSA file no. 22035, UL file no. E51293. Specifications printed on wire. Use in internal wiring where exposure to temperatures does not exceed 221°F or where exposure to oil at temperatures not exceeding 140°F. CSA type TEW FT1.

[Read More](#)

**SKU:** 29181-02

**Price:** \$23.63

**Categories:** [18 Gauge](#)

### Product Description

---



## 18 Gauge Y Wire 100 Foot Roll

Non Stock, Item Must Be Ordered. 18 gauge Y hook-up wire is ideal for machine tools, control cabinets, automotive and marine applications. The thermoplastic insulation is moisture resistant and provides extra protection against nicks and cuts. UL style 1015/1230, 105°C, rated for 600 volts. Manufactured to meet or exceed the specifications of the Y, NFDA, ANSI and J1128. CSA file no. 22035, UL file no. E51293. Specifications printed on wire. Use in internal wiring where exposure to temperatures does not exceed 221°F or where exposure to oil at temperatures not exceeding 140°F. CSA type TEW FT1.

221°F or where exposure to oil at temperatures not exceeding 140°F. CSA type TEW FT1.

[Read More](#)

**SKU:** 29181-06

**Price:** \$23.63

**Categories:** [18 Gauge](#)

## Product Description

---



### 18.5 Oetiker Style Stepless Clamp, 100 A Bag

15.3-18.5 mm or 39/64-47/64

[Read More](#)

**SKU:** 18.5-100

**Price:** \$23.20

**Categories:** [Oetiker Style Bag Of 100](#)

## Product Description

---



### 18.5 Oetiker Style Stepless Clamp, 25 A Bag

15.3-18.5 mm or 39/64-47/64

[Read More](#)


**SKU:** 18.5-25

**Price:** \$8.75

**Categories:** [Oetiker Style Bag Of 25](#)

## Product Description

---

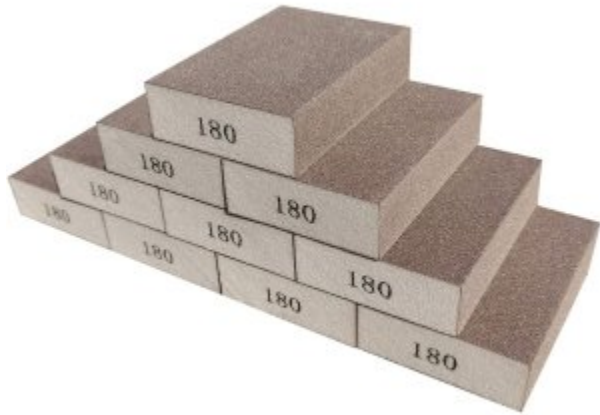

### 180 Grit Sanding Blocks, 10 Pack

Sanding Sponge, 2.7" L x 3.9" W x 1" H, Washable and Reusable Sanding Blocks, Used For Resurfacing Stainless Steel Equipment.

[Read More](#)

**SKU:** QMP519

**Price:** \$23.38

**Categories:** [Cleaners](#)

## Product Description

---



### 19.8 Oetiker Style Stepless Clamp, 100 A Bag

16.6-19.8 mm or 21/32-25/32

[Read More](#)

**SKU:** 19.8-100

**Price:** \$24.61

**Categories:** [Oetiker Style Bag Of 100](#)

## Product Description

---



## 19.8 Oetiker Style Stepless Clamp, 25 A Bag

16.6-19.8 mm or 21/32-25/32

[Read More](#)

**SKU:** 19.8-25

**Price:** \$9.31

**Categories:** [Oetiker Style Bag Of 25](#)

### Product Description

---



## 2 1/2 Inch Inline Filters Clip, Screw Mount

Fits Filter Series, K5000 And IAP

[Read More](#)

**SKU:** PPC212W

**Price:** \$1.05

**Categories:** [Inline](#)

### Product Description

---



## 2 Inch Inline Filters Clip, Screw Mount

Fits Filter Series, K2000, SCL, SL, CL, IAC.

[Read More](#)

**SKU:** PPC204W

**Price:** \$0.98

**Categories:** [Inline](#)

### Product Description

---



## 2 Wide Bib Incline Rack

Comes With Caps And Extensions To Add More Racks, Item Is For Will Call Only Or Can Be Drop Shipped From Mfg, Box Of 4

[Read More](#)

**SKU:** 2-BIFJ

**Price:** \$59.44

**Categories:** [Bib Accessories](#)

### Product Description

---



## 2.8 Oz 100% Clear Silicone Sealant USDA Authorized

Protect and seal with 100% silicone rubber Waterproof, weatherproof, won't crack, dry out or crumble.Meets Fed. Spec.TT-S-001543A, Class A USDA authorized for use in federally inspected meat and poultry plants. Meets requirements of FDA Regulation No. 21CFR177.2600. CID-A-A-272. Type IV

[Read More](#)

**SKU:** DC732-3C

**Price:** \$9.71

**Categories:** [Sealants](#)

### Product Description

---



## 20 Gauge Black Wire 100 Foot Reel

Non-Stock, Item Must Be Ordered 2 Weeks in Advance. Known as AWG wire, 20 gauge wire is commonly used in marine, industrial, and automotive applications. 20 gauge wire is composed of copper and polyvinyl chloride (PVC) insulation. The wire features a smooth finish and is ideal for pulling through conduits. It can be used on original equipment or for retrofit projects. Single conductor polyvinyl chloride insulated wire operates at temperatures from 40°F to 176°F).Meets J1128, Ford M1L56A

[Read More](#)

**SKU:** 11201

**Price:** \$16.9

Categories: [20 Gauge](#)

Product Description

---