



Angle Stop Max Adapter, Lead Free 1/2 x 1/2 x 3/8

Male Compression x Female Compression Swivel x Male Compression Lead Free, Easily Converts Angle Or Straight Stops To Dual Outlet Valves

[Read More](#)

SKU: MAX86

Price: \$10.27

Categories: [Adapters](#)

Product Description



Angle Stop Max Adapter, Lead Free 3/8 x 3/8 x 1/4

Male Compression x Female Compression Swivel x Male Compression, Easily Converts Angle Or Straight Stops To Dual Outlet Valves

[Read More](#)

SKU: MAX4

Price: \$5.41

Categories: [Adapters](#)

Product Description



Angle Stop Max Adapter, Lead Free 3/8 x 3/8 x 3/8

Male Compression x Female Compression Swivel x Male Compression, Easily Converts Angle Or Straight Stops To Dual Outlet Valves

[Read More](#)

SKU: MAX6

Price: \$5.92

Categories: [Adapters](#)

Product Description



Angle Stop, Lead Free, 5/8 Inch. Od Compression x 3/8 Inch Od Compression, Chrome Plated Finish, Multi Turn.

This angle stop features a solid brass construction, a chrome-plated finish, and a celcon stem. All of its features comply with state lead-free requirements.

[Read More](#)

SKU: 101584

Price: \$4.43

Categories: [Plumbing](#)

Product Description

Aquatec 28 Ounce Accumulator Tank With 3/8 Female Pipe Threads



Convenient 3/8" Female NPT ports. Compact design fits in small spaces, Dimension 8.92" L X 4.84" W X 4.13" H Dampens pump switch cycling/pulsations. Limits harmful spikes/water hammer. Minimizes hydraulic noise NSF food grade materials Easy to install and maintain Mounts in any position with included bracket. Maximum Working Pressure - 125 PSI. Pre-Charge - 20 PSI

[Read More](#)

SKU: 30573-0002B

Price: \$51.30

Categories: [Pumps](#)

Product Description



Aquatec De Pump 6.0 G Foot Cord, 2

The Aquatec 550 Series Diaphragm Pump is designed to operate at low pressure from a low pressure source. It can run continuously and is suitable for use with pumps can be operated continuously (pressure switch controlled) or intermittently (controlled by external pressure switch). It does not need an integral pressure switch. 5-chamber diaphragm Independent diaphragms ensure structural integrity

composite plastics Corrosion resistant metal Pressure switch and transducer options Aquatec 5513 Demand Pump Benefits: Self-priming Unparalleled performance efficiency Whisper quiet at lower flows Minimal pulsations 7 year design life Runs dry without damage Chemically resistant versions Aquatec 5513 Demand Pump Technical Information Aquatec 550 Series Demand Pump Data 5513 550 Series Superflow Pumps Aquatec 550 Series Superflow Pumps Duplex 2 Series Pumps are suited for chemical or beverage and water applications such as city water pressure boost. Built in check valve.


[Read More](#)

SKU: 5513

Price: \$163.76

Categories: [Pumps](#)

Product Description

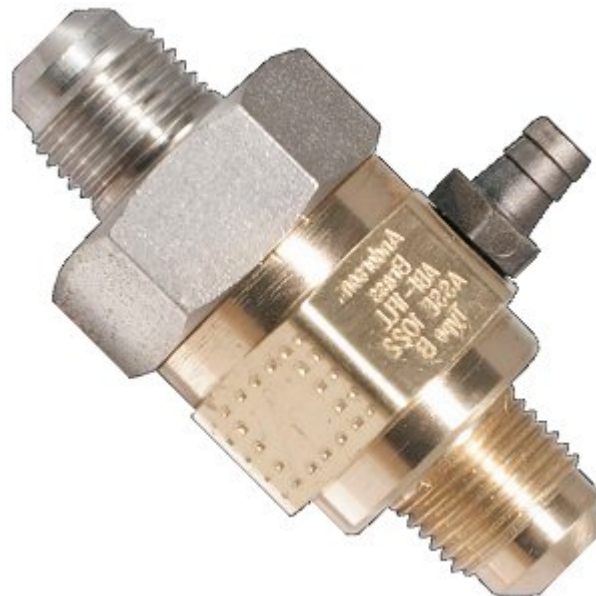

ASSE 1022 3/8 Flare x 1/2

ASSE 1022 vented check valve protects the connected equipment from the corrosive gas mixed with water in the discharge primary cycle. If this check valve the CO2 gas and water cannot pass to the vent fitting. The gas cannot pass to the vent from the connected equipment. The construction is easy to install. The brass body and stainless steel

Under no circumstance is the CO2 gas and water mixture exposed to the lead-free brass inlet or the connected plumbing.

[Read More](#)

SKU: 19-0897F

Price: \$50.49

Categories: [Backflow](#)

Product Description



ASSE 1022 Backflow Preventer, 3/8 Flare x 3/8 Mpt x 1/4 Barb

ASSE 1022 vented dual check back flow preventer protects the connected plumbing and drinking water from the corrosive effects of CO2 gas. The CO2 gas mixed with water in a carbonator tank downstream from the back flow preventer exerts back pressure on the discharge primary check valve on every pumping cycle. If this check valve becomes fouled and leaks, the CO2 gas and water mixture will exhaust through the vent fitting. The secondary check insures that it cannot pass to the inlet or contact any brass or copper from the connected plumbing. The simple internal construction is easy to clean. It utilizes a lead free brass body and stainless steel discharge retainer. Under no circumstance is the CO2 gas and water mixture exposed to the lead-free brass inlet or the connected plumbing.

[Read More](#)

SKU: 19-0897

Price: \$50.49

Categories: [Backflow](#)

Product Description

Barb Beer Stem 1/4, For Use With 1020 Beer Nut And 8016 Beer Washer



[Read More](#)

SKU: S22-4CF

Price: \$1.84

Categories: [Barb](#)

Product Description

Barb Beer Stem 3/8, For Use With 1020 Beer Nut And 8016 Beer Washer



[Read More](#)

SKU: S22-6CF

Price: \$1.82

Categories: [Barb](#)

Product Description

Barb Beer Stem 5/16, For Use With 1020 Beer Nut And 8016 Beer Washer



[Read More](#)

SKU: S22-5CF

Price: \$2.00

Categories: [Barb](#)

Product Description



Base For Softener, Inside Diameter 6 1/2 Inches

Non Stock, Item Must Be Ordered

[Read More](#)

SKU: WS68B

Price: \$11.82

Categories: [Softeners](#)

Product Description
